


► Product Appearance




► Product Size



Net Weight: 47.6±0.5kg

► Packaging Size

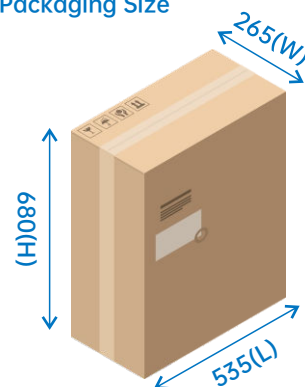

Gross Weight: 55.3±0.5kg


► Features

- A grade brand new solid-state cells
- >5000 cycles @80% DOD(25°C, 0.5C)
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Compatible with most inverters on the market
- Cell balance function
- Wall-mounted style
- Certificate: UN38.3, MSDS, IEC62619 ROHS
- Max 8 battery packs can be connected in parallel


► Electrical Characteristics

Model	LFP5.42KWH51.2V-P65H2QT50	
Electrical Parameter		
Battery type	LiFePO4	
Nominal voltage	51.2V	
Nominal capacity	106AH	
Energy	5427Wh	
Pack mode	16S2P	
Continuous discharge current	50A	
Charge cut-off voltage	57.6V	
Discharge cut-off voltage	41.6V	
Max. charge current	50A	
Max. discharge current	100A	
Peak discharge current	120A	
Recommend discharge current	50A	
Recommend discharge depth	80%	
Cycle life	> 5000 cycles (25°C, 0.5C) 80% DOD	
Communication	RS485 RS232 CAN	
Display	LCD	
Environmental Parameter		
Charge & discharge temperature	Charge: 0°C~+55°C Discharge: -20°C~+60°C	
Optimal storage temperature	5°C ~ +35°C	
Relative humidity	40%-80%	
Ingress protection	IP65	
Mechanical Parameter		
Terminal	Quick-plug	
Dimensions (WxHxD) (mm)	470x190x600	
Weight (Kg)	47.6±0.5	
Certificate	UN38.3 MSDS IEC62619 ROHS	


Different Rate Discharge Curve@25°C

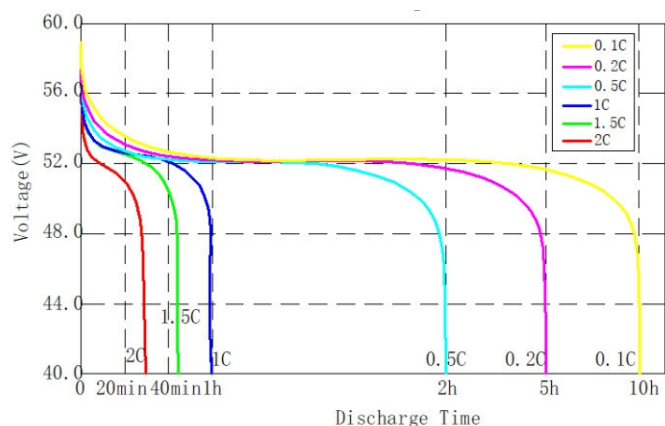


Different Temperature Discharge Curve@0.5C

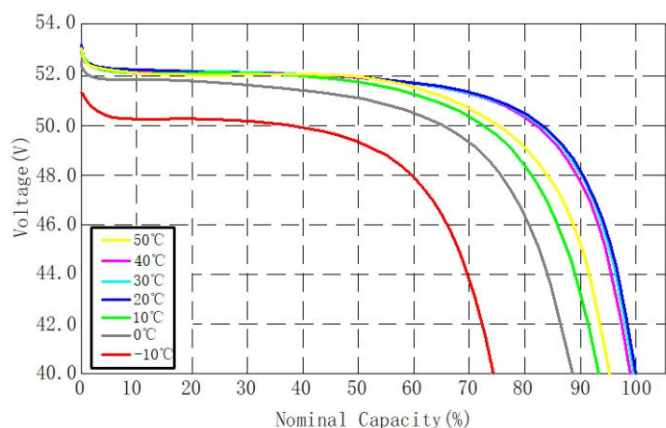


State of Charge Curve@0.5C 25°C

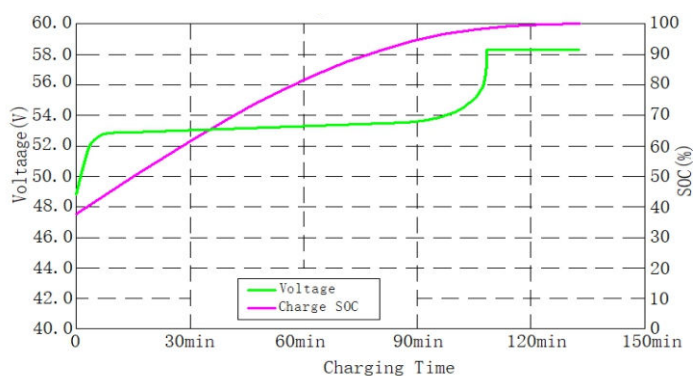

Charging Characteristics @0.5C 25°C

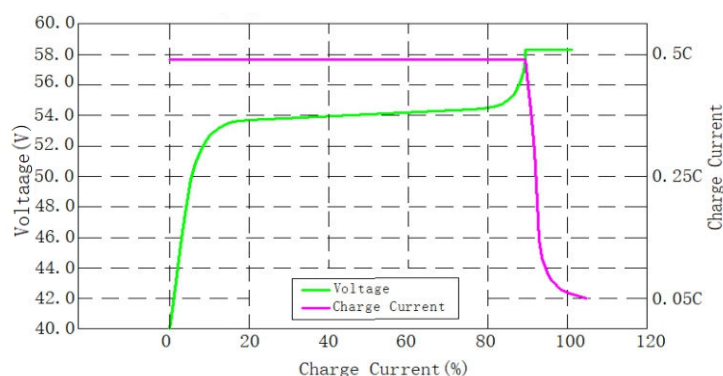

Different DOD Discharge Cycle Life Curve@0.5C 25°C

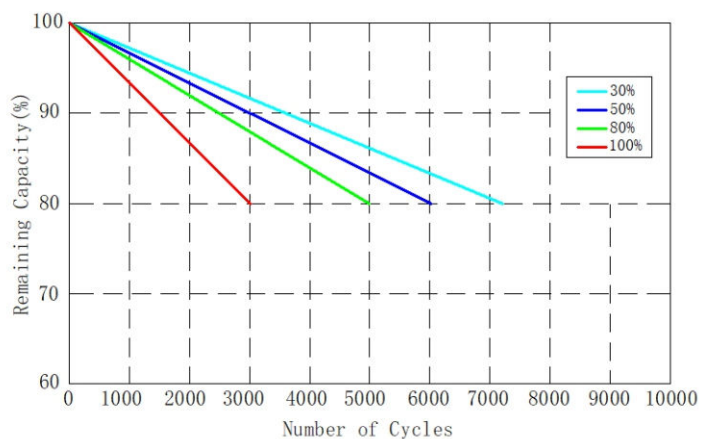

Different Temperature Self Discharge Curve

